

## VULCAN CHAIN BLOCK

### TWO YEAR WARRANTY

Superior quality

Approved ANSI B30.16


Overload protection available

### TECHNICAL SHEET

- 1/2T to 20T
- High quality heat treated alloy steel load chain
- Light weight for portability
- 2 load chain guides
- Weston type brake
- Very low headroom
- Hooks are forged heat treated steel
- Hand chain is zinc treated and 3 foot less than lift
- Safety orange finish with capacity markings



## TECHNICAL SPECS

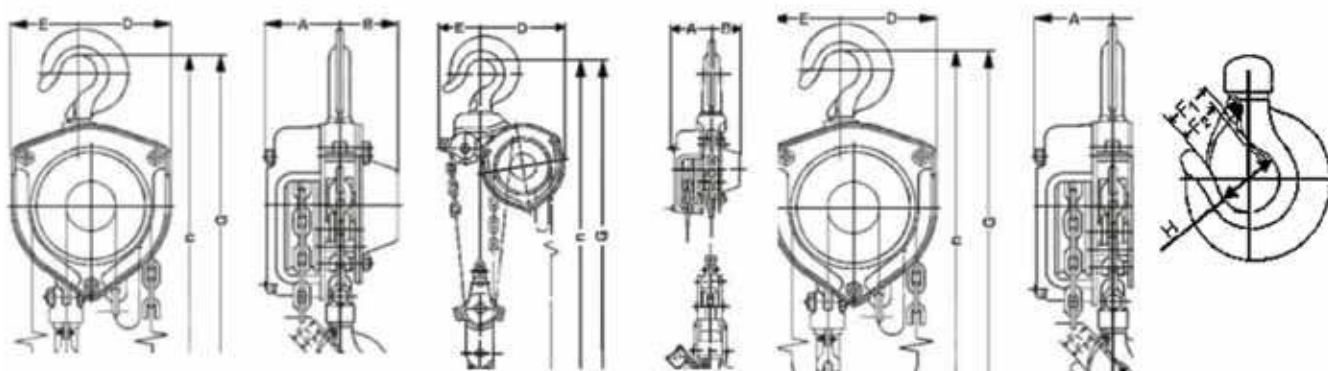

| MODEL  | Cap. Tons | Safe working load | Standard lift | Pulling effort | No. of chain falls | G Headroom | Net weight |
|--------|-----------|-------------------|---------------|----------------|--------------------|------------|------------|
|        |           | lb                | in            | lb             |                    | in         | lb         |
| VB1/2T | 1/2       | 1 100             | 10            | 46.2           | 1                  | 11 1/4     | 17.6       |
| VB1T   | 1         | 2 200             | 10            | 52.8           | 1                  | 13 1/2     | 23.1       |
| VB1.5T | 1,5       | 3 520             | 10            | 64.9           | 1                  | 15 1/4     | 33         |
| VB2T   | 2         | 4 400             | 10            | 73.7           | 1                  | 17 1/8     | 46.2       |
| VB3T   | 3         | 6 930             | 10            | 83.6           | 1                  | 20 1/4     | 67.1       |
| VB5T   | 5         | 11 000            | 10            | 79.2           | 3                  | 23         | 77         |
| VB10T  | 10        | 22 000            | 10            | 94.6           | 3                  | 31 1/8     | 167.2      |
| VB15T  | 15        | 35 200            | 10            | 103.4          | 5                  | 39 7/8     | 341        |
| VB20T  | 20        | 44 000            | 10            | 99             | 6                  | 40 5/8     | 550        |

| Cap. Tons | Dimensions in |       |        |        |         |         |
|-----------|---------------|-------|--------|--------|---------|---------|
|           | A             | B     | D      | E      | F1      | F2      |
| 1/2       | 3 1/4         | 2 1/4 | 3 1/2  | 1 7/8  | 1 15/16 | 1 3/16  |
| 1         | 3 1/4         | 2 1/2 | 4      | 2 3/8  | 1 9/64  | 1 27/64 |
| 1.5       | 3 1/2         | 3     | 4 1/2  | 2 3/4  | 1 7/32  | 1 17/32 |
| 2         | 3 7/8         | 3 3/8 | 5 1/4  | 3 1/4  | 1 11/32 | 1 21/32 |
| 3         | 4 1/8         | 3 5/8 | 6 3/8  | 3 3/4  | 1 17/32 | 1 57/64 |
| 5         | 3 1/2         | 3     | 7 3/8  | 3 3/4  | 1 27/32 | 2 13/64 |
| 10        | 4 1/4         | 3 5/8 | 11 1/8 | 4 7/8  | 2 43/64 | 2 61/64 |
| 15        | 4 1/4         | 3 5/8 | 13 3/8 | 8 1/8  | 3 3/16  | 3 35/64 |
| 20        | 6 1/8         | 6 1/8 | 15 3/8 | 15 3/8 | 3 3/16  | 3 35/64 |