

VULCAN TROLLEY

TWO YEAR WARRANTY



Superior quality

Approved ANSI B30.11


Steel wheels 5T & over

TECHNICAL SHEET

- Drop stops and bumpers
- Precision sealed ball bearing
- Universal wheels ½ - 5T (I & H)
10T for I-beam only or H-beam only

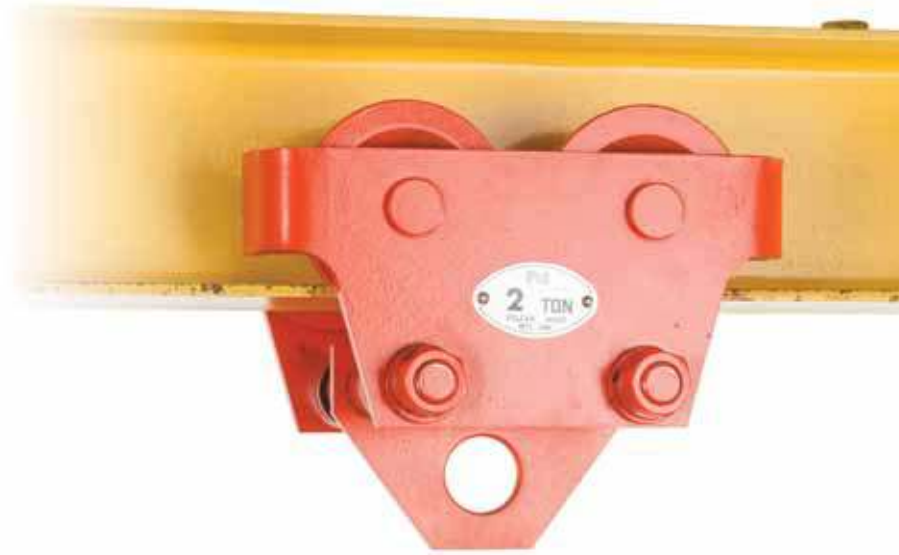

PLAIN



GEAR

TECHNICAL SPECS

MODEL		Dimensions in								Net weight	
		Cap. Tons	G Head-room	Beam** min. Height	Width (flange)		H Wheel tread dia	L Tread Width	Radius of curve min.**	Plain	Gear* 10' chain
Plain	Gear*				Min.	Max.				lb	
VPT1/2T	VGT1/2T	1/2	4 1/8	3	2 1/2	6	2 1/4	1 1/16	36	17	25
VPT1T	VGT1T	1	3 7/8	4	3	5 1/2	2 1/2	7/8	44	18	26
VPT1.5T	VGT1.5T	1 1/2	4 1/2	4	3	5 1/2	2 3/4	7/8	44	24	33
VPT2T	VGT2T	2	5 1/8	5	3 3/8	6 1/2	3 1/4	1	59	37	51
VPT3T	VGT3T	3	5 1/2	5	3 3/8	6 1/2	4 1/4	1 3/8	59	57	70
VPT5T	VGT5T	5	5 7/8	6	4 1/2	7 1/4	4 3/8	1 1/2	59	99	115
VPT10T	VGT10T	10	9	7	5	7	6	1 3/4	118	197	253
---	VGT15T	15	13	13	6 1/4	7 8	8 1/2	2 1/4	197	---	717
---	VGT20T	20	16 1/2	15	7	71/2 8	10 1/2	2 1/2	197	---	836

Specify beam height & width or height & lb per ft

* When used w/electric hoist, hand chain wheel extension required & hoist must be parallel to beam

** May vary depending on the size of the beam

