

VERTICAL LIFTING CLAMP WITH REMOTE CONTROL (SVC-L)

TWO YEAR WARRANTY

TECHNICAL SHEET

Vertical lifting clamp for the lifting of steel plates and steel structures.


- With the use of a remote control lever and rope, which are supplied with the clamp, the clamp can be unlocked from the floor to detach from the work piece.
- The spring-loaded tightening lock mechanism assures a positive initial clamping force.
- The clamping force increases in proportion to the weight of the load.
- The main body and the shackle are made of die-forging which is optimally tempered for maximum strength and durability.
- High-frequency quenching of special alloy steels gives greater durability to the cam.
- The main body is a baked-on finished.



TECHNICAL SPECS

MODEL	Capacity (Tons)	Jaw opening mm	Net weight kg
SVC0.5L	0.5	0-19	3
SVC1L	1	0-25	6
SVC2L	2	0-30	10.5
SVC3L	3	0-35	12.5

Capacity	Dimensions mm												
	L [max.]	H	h1	h2	h3	B	b1	b2	D1	D2	T1	T2	T3
0.5	250	158	80	60	36	131	36	26	36	64	89(80)	67	49
1	310	185	90	69	45	151	42	32	48	85	113(104)	81	59
2	375	210	100	77	47	172	48	39	60	106	130(118)	97	71
3	405	225	105	81	47	182	51	42	66	117	141(129)	102	75

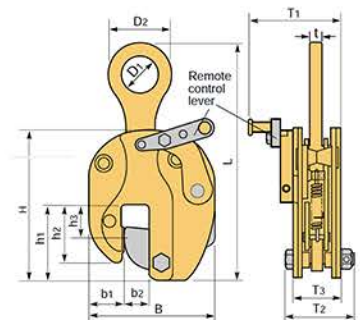

EXAMPLES OF USE

