

E-mail: service@sarracocrane.com

RATCHET PULLER XT

VULCAN'S XT SERIES RATCHET PULLER:

A technologically advanced, compact, light and sturdy lifting equipment

3/4T to 9T capacities

2-year warranty

ANSI/ASME B30.16

Complete nameplate with serial number

150% test load

Testing and inspection certificate included

Safe

- Overload protection included.
- Automatic brake engagement.
- Ultra-robust fork-type cast steel safety latch.

Weatherproof

- High-resistance powder coat paint.
- Zinc-plated grade 100 chain.

Sturdy

- Hardened-steel hooks.
- Shockproof steel case assembled with blind nuts for intensive use.

Easy to handle

- Top and bottom hooks rotate 360 degrees.
- 360-degrees handle rotation.






E-mail: service@sarracocrane.com

RATCHET PULLER XT

MODEL	Capacity (tons)	Safe working load	Test load 150%	Standard lift	No. of chain falls	Pulling effort	Net weight
		lb	Tons	ft		lb	lb
XPU0.75T	0.8	1760	1.2	5	1	48	12.5
XPU1.5T	1.6	3 5 2 0	2.4	5	1	68	17.6
XPU3T	3.2	7040	4.8	5	1	84	29.9
XPU6T	6.3	13860	9.4	5	2	86	57.3
XPU9T	9	19800	13.5	5	3	88	88.1

MODEL	Dimensions (mm)									
MUDEL	а	b	С	d	е	f	g	h		
XPU0.75T	146	119	41.5	280	245	96	26.5	35.5	14	
XPU1.5T	164	126	52	335	265	100	35.5	42.5	19	
XPU3T	196	159	61.9	395	415	114	43	50	24.5	
XPU6T	196	218	84.3	540	415	114	53	60	34	
XPU9T	196	298	-	680	415	114	64	85	40	

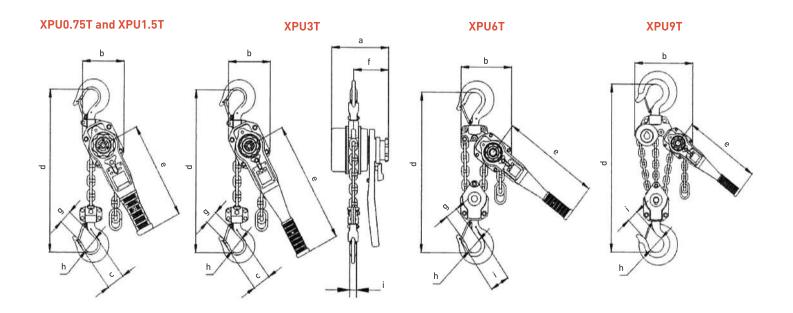



E-mail: service@sarracocrane.com

RATCHET PULLER XT



A HIGH-QUALITY PRODUCT WITH IMPRESSIVE FEATURES



Overload protection included to protect your people and your equipment.



Handle-shape sturdy steel free chain stop for more maneuverability.



Freewheel system in 2 safe steps that eliminates the risk of accidentally releasing the load.



Zinc-plated, weatherproof mechanical parts and chain and armored steel side plates.



Ultra-robust fork-type cast steel safety latches. The days when safety latches used to keep breaking are gone.



Double reduction gears with **permanent lubrication** for unparalleled performance.



Shockproof steel case... Assembled with **blind nuts** for **intensive use**.





E-mail: service@sarracocrane.com

RATCHET PULLER XT



HOW THE CLUTCH SYSTEM WORKS

Disengaging the clutch







To free the clutch, gently pull on the free chain (opposite to the load chain).

ONE OF THE SAFEST EQUIPMENTS ON THE MARKET

The patented safety brake prevents any movement from the load chain if the ratchet puller is supporting a load while being put in neutral.

Engaging the clutch















FASTENING

PULLING